



Technical sheet

TRANSPORT / DELIVERY

- 3 closed euro-pallets with wood frames H. 57 cm- 370 kg each
- 1 closed euro-pallets with wood frames H. 97 cm- 170 Kg
- 1 wooden crate, L 325 cm W 37 cm H 45 cm- 180 Kg

- The pallets can not be stored outside
- A pallet truck on the stage is needed

INSTALLATION

Set up: 6 hours
Removal: 3 hours

Manpower

To be provided by the organizer:

Assembly of the sculpture:

- 1 person during 2 hours

Light:

- To define according to the concept chosen from the engineer of the place

Dismantling of the sculpture

- 1 person during 2 hours

Installation

The perimeter of security (diam. 11 m) must be marked on the ground.
Height of the exhibition space: Min. 6 m

Nyløid is not made to be exhibited outdoors. Nevertheless it may be done for a short time provided that the weather is dry.

Nyløid cannot work alone, it needs to be operated by the artists as a performance. A control booth must be placed in the same space. A table of 2 meters in length and two chairs will be provided. Cable protections must be installed in the public area.

The ground should not be delicate and **as smooth as possible** (wood, stone floor, tiling, smooth concrete...)






Equipment provided by the organizer:

- A three-phase electric supply 3x 400V-16 A (connector EEC 16)
- Power supply for the 3 loudspeakers 230 V-16A (separate group)
- Sound cables XLR
- Control booth


The lighting of the installation is defined on the exhibition place with the light engineer of the place.

Size of the installation

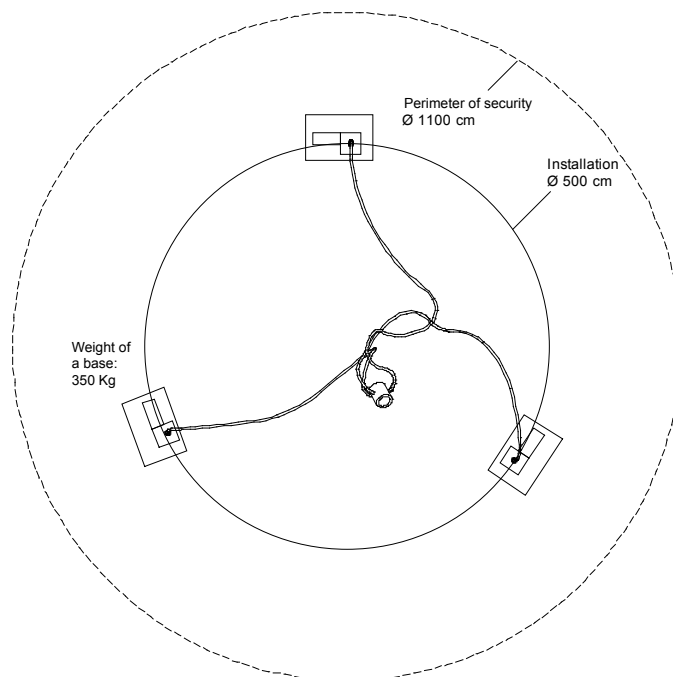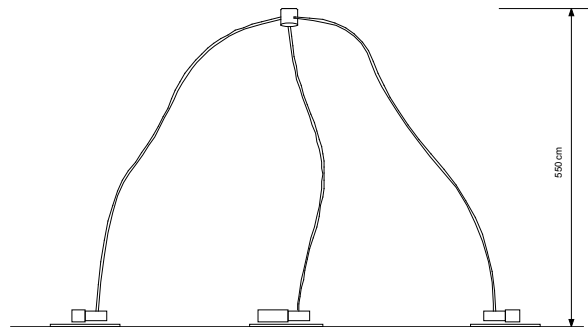

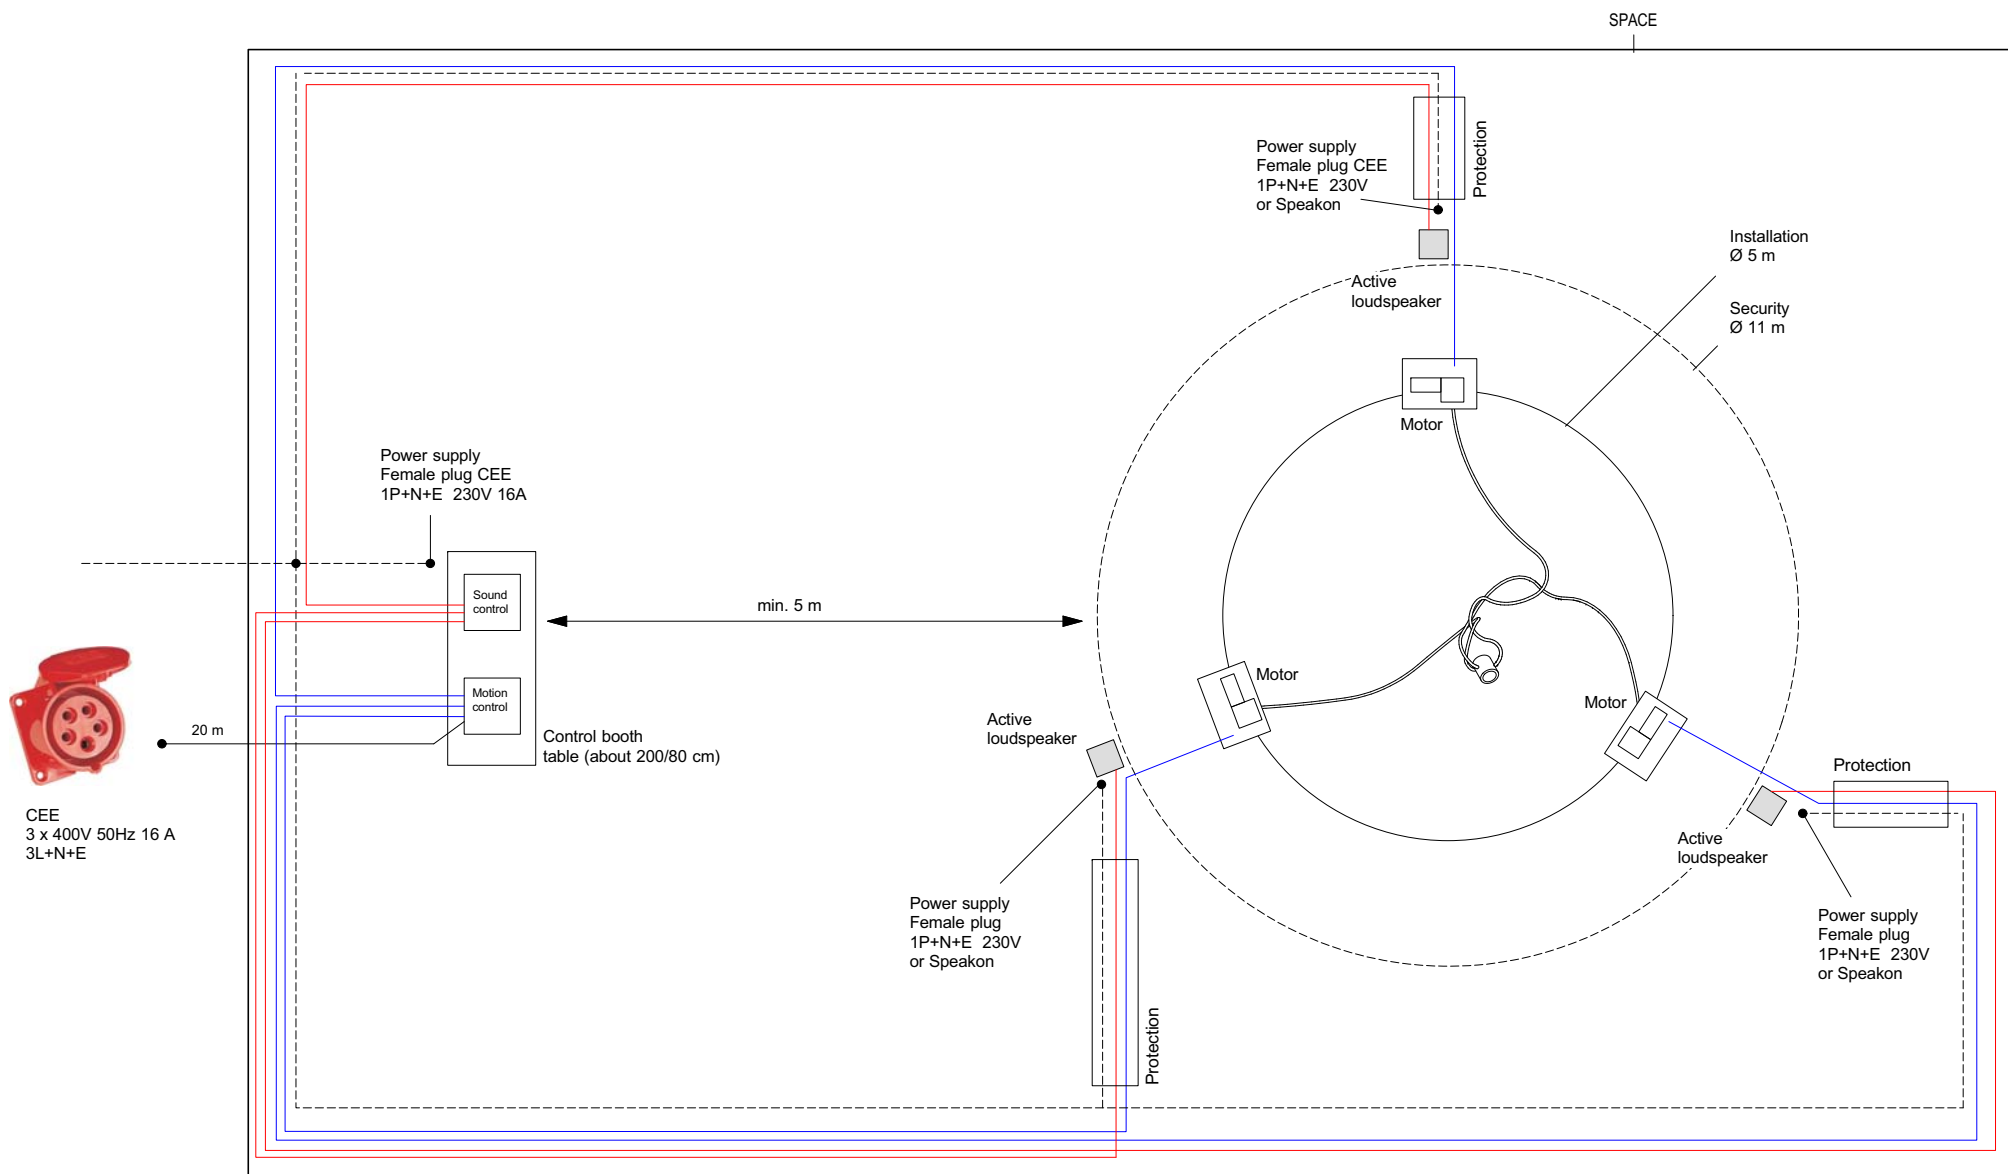

If the space is too big, it's possible to place the cables on the security perimeter

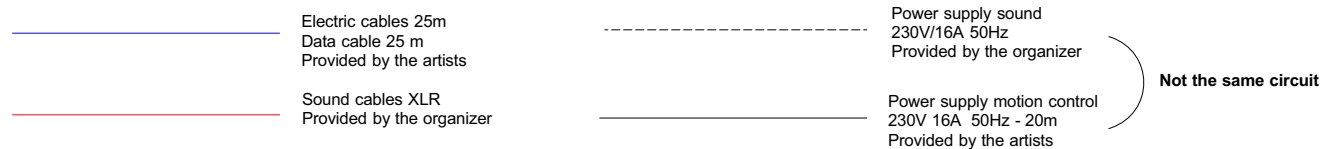

**Electric schema
Nyloid**